


**Specifications**

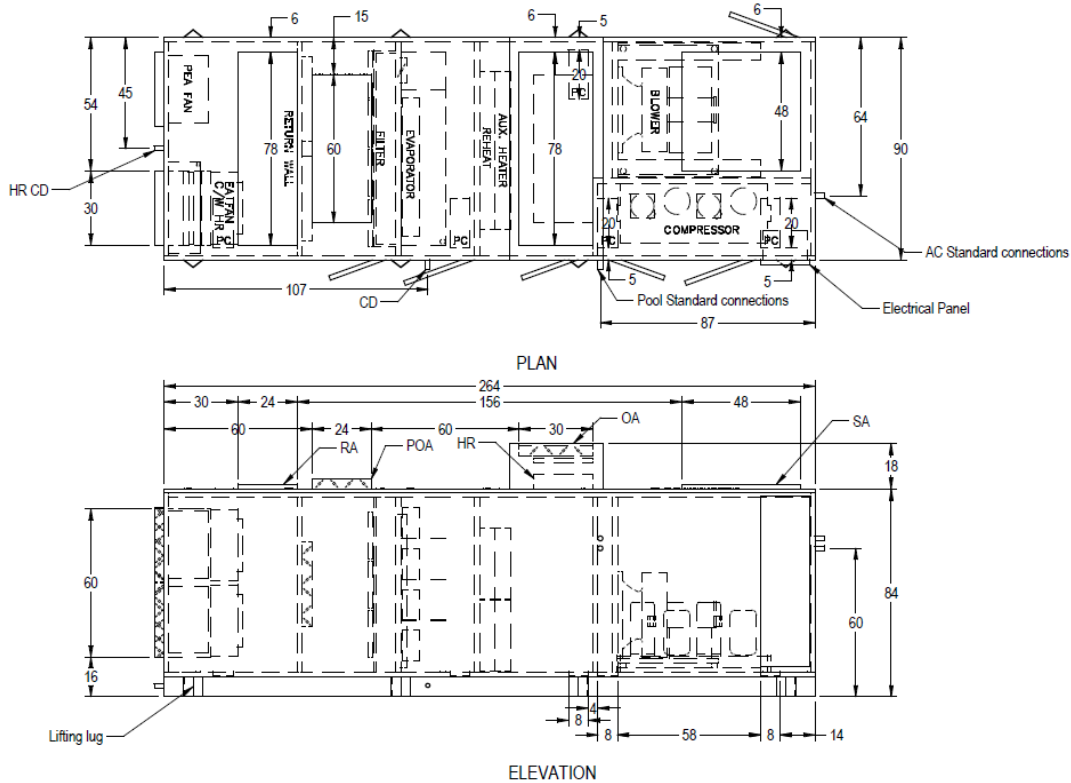

**Unit Design Conditions and Capacities**

<b>Nominal Air Flow (CFM @1" ESP)</b>	12000
<b>Cabinet Air Flow Range</b>	9000-20000
<b>Outdoor Air Flow (CFM)</b>	1800
<b>Minimum Exhaust Air Flow</b>	1980
<b>Purge/Economizer Air Flow</b>	10020
<b>Unit Weight (lbs)</b>	10200
<b>Total Compressor Heat Rejection (MBH)*</b>	384.4
<b>Total Cooling Capacity (MBH)*</b>	307.5
<b>Sensible Cooling Capacity (MBH)*</b>	189.5
<b>Moisture Removal Capacity (lbs/hr)*</b>	143.5
<b>Dry Cooler Model</b>	NG-024
Capacity (MBH @95F)	390
Field Pipe Size (inch)	2"
<b>Pool Heating:</b>	
GPM / ΔP (PSI)	40/7
Connection (in.)	1.5
Pool Heating (MBH)	234

\*Capacities at 82F/60%RH.

<b>Voltage</b>	<b>208-240/03</b>	<b>460-480/03</b>	<b>575-600/03</b>
<b>MCA</b>	157	66	52
<b>MOP</b>	200	80	60

**Standard Features**

- CommandCenter microprocessor
- WebSentry internet monitoring (1 yr free labor warranty when connected)
- Protocol design
- Direct drive plenum fans
- Fully dipped coils
- Multiple supply orientations
- 2" Double walled cabinet
- 2 Year parts warranty

**Optional Features Shown**

- Heat recovery on minimum exhaust/outside air
- Purge/Economizer
- Hot water auxiliary heating coil
- Pool water heating

**Available Options**

- BACnet IP, Modbus or LonWorks interface
- Indoor or outdoor cabinet design
- Outdoor packaged available
- Heat rejection to cooling tower or geo-loop
- Gas, electric, or hot water auxiliary heating
- Remote CommandCenter panel
- Motorized OA damper with occupied schedule
- Mirrored cabinet
- Higher or lower supply airflows or static pressures
- Higher or lower OA/EA airflows
- Unit mounted disconnect
- Extended warranties